


Technical data sheet

Protection set MCD + V20 3-pole with remote signalling

Item no. 5089756

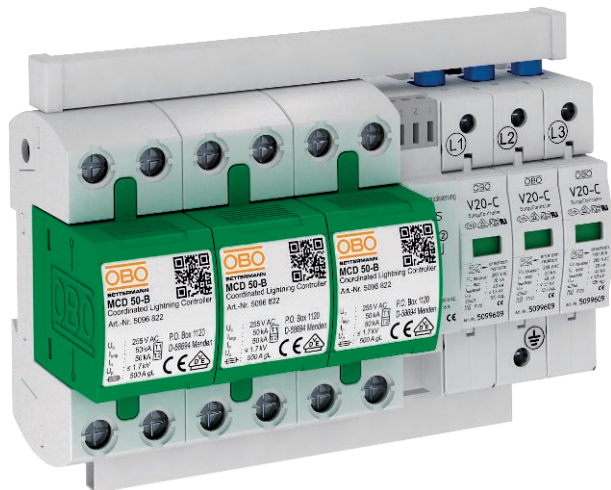


Protection set, lightning and surge arrester type 1+2

- Arresting capacity 100 kA 10/350 μ s, BET-tested
- Pre-mounted and ready for connection, incl. connecting bridges, labelled connection terminals
- With remote signalling and potential-free NO contact for function monitoring
- For use in TN-C network systems

Note: Max. backup fuse (required only if not already fitted in network) 125 A gL/gG.



Dimensions

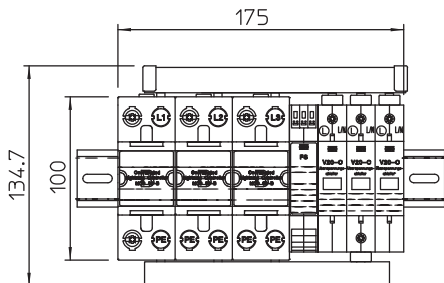

Master data

Item no.	5089756
Type	PS3-B+C TNC+FS
Description 1	Protection set
Description 2	three-pole with RS
Dimension	255V
Smallest sales unit (VG)	1,00 Piece
Weight	163,00 kg/100 pc.


Technical data sheet

Protection set MCD + V20 3-pole with remote signalling

Item no. 5089756



Technical data

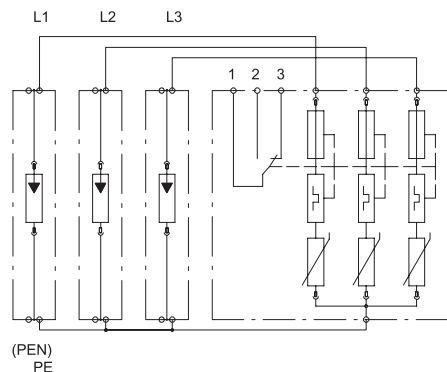

SPD to EN 61643-11	Type 1+2
SPD to IEC 61643-11	Class I+II
Nominal voltage	230,00 V
Maximum continuous voltage AC	255,00 V
Max. continuous operating voltage	255,00 V
Maximum continuous voltage (L-N)	255,00 V
Nominal discharge current (8/20 µs)	50,00 kA
Nominal discharge current (8/20)	50 kA
Maximum discharge current (8/20 µs)	100,00 kA
Lightning surge current (10/350 µs)	50,00 kA
Impulse discharge current (10/350)	50,00 kA
Lightning impulse current (10/350) (L-N)	50,00 kA
Lightning surge current (10/350)	100,00 kA
Arrestor surge current (8/20) [total]	100,00 kA
Protection level	<1,7 kV
Follow current quenching capacity (eff) [N-PE]	25,00 kA
Follow current quenching capacity left	12,50 kA
Response time	<25 ns
Maximum back-up fuse	125,00 A
Temperature range	-40+85 °C
Pole version	3
Pole number	3,00
Version	3-pole with FS; 255 V
Version	3-pole
Mounting type	Hat rail 35 mm
Installation type	DIN rail 35 mm
Protection rating	IP20
Protection rating	IP 20
Blow-out	<input type="checkbox"/>
Division unit TE (17.5 mm)	10
Remote signalling	<input checked="" type="checkbox"/>
Telecommunications contact	<input checked="" type="checkbox"/>
Connection cross-section, flexible	10,00 - 25,00 mm ²
Connection cross-section, rigid	10,00 - 50,00 mm ²
Connection cross-section, multi-wire	10,00 - 35,00 mm ²
Signalling on device	Visual